







CAPTAIN - LOW CUT

Article No.: 74110CV561 Model No.: 8740-4

Cavalier™ Captain Safety Footwear is designed to Made from High Quality smooth leather offer optimum comfort during long work hours. Double density PU sole which is anti-slip with deep groves. Suitable for any nature of harsh working conditions. Low-cut safety shoes provided with breathable inner lining for extra comfort.







Antistatic Anti-bacterial Foam





OIL RESISTANT



COMPOSITION:

- Safety Boots S3, made from selected High Quality Smooth Leather.
- Good Design, lightweight, comfortable, antislip, breathable

FEATURES:

Upper: High Quality Smooth Leather

Lining: Black 3D Mesh Lining

Toe-Cap: Composite toe cap - 200J Resistant **Midsole:** Non-metallic Antiperforation textile

meeting EN 12568:2010

Insole: Antistatic with + Antibacterical Foam

EVA + Nylon lining

Sole: Double Density PU/RPU (Direct Injection)

Heel Stiffener: Thermoplastic

Norm: EN ISO 20345:2011 CE

Category: S3 SRC
Color: Black

Sizes: 36-48 (Europe)



Category Description

53 200 Joule Toecap Protection. Closed seat region (fully enclosed heel). Antistatic properties. Energy absorption of seat region. Water penetration and water absorption resistance. Plus penetration resistance. Cleated outsole.



This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT FW 9004-3.2

BORN TOUGH



PERSONAL PROTECTIVE EQUIPMENT




CAPTAIN - LOW CUT

Article No.: 74110CV561 Model No.: 8740-4



TECHNICAL SPECIFICATIONS

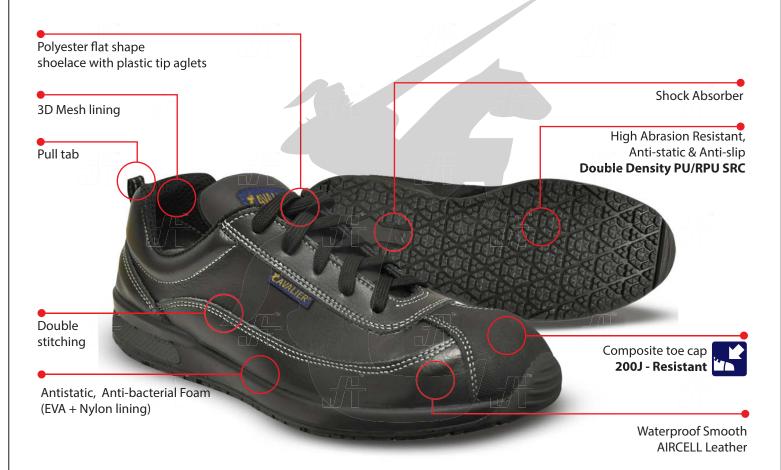



100% No Metal




SHOE SIZE CHART AS PER EUROPEAN STANDARDS													
EU	36	37	38	39	40	41	42	43	44	45	46	47	48
EU	3	5	5	6	6.5	7	8	9	10	10.5	11	11	13



Category Description

53 200 Joule Toecap Protection. Closed seat region (fully enclosed heel). Antistatic properties. Energy absorption of seat region. Water penetration and water absorption resistance. Plus penetration resistance. Cleated outsole.



This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT FW 9004-3.2

BORN TOUGH

